

TURIST (or not turist)

2018 Version

TECHNICAL SHEET

:: SCENARIO / MACHINERY

Assembly time

- Installation 4 hours
- Focus and equalization 2 hours

Minimum stage dimensions

- 12 x 9m. (40 x 30 feet)

Black masking

- 4 sets of legs
- 4 back drops

Bars (situated as mapped)

- 3 electric bars on stage
- 1 frontal light

Others

- Central access stairs (public - stage) 3 tables 2 x 1 m (6,5x 3,3 feet)

:: LIGHTS

Front room

- 9 x 1kW profile spotlights 15 / 30o Robert Juliat, ADB or similar (*)
- 4 Cyc lights(*)

Stage

- 13 x 1kW PC projectors with barndoors . Robert Juliat, ADB or similar (*)
- 3 PAR-64 1kW no5 (lamp CP-62) (*)
- 14 Cyc lights

(*) All these projectors must wear filter holder, claw and safety cable.

Dimmers / Control

- 27 control channels 2 Kw. DMX-512 protocol.
- Cabling needed for the entire set up of the lighting.

:: SOUND

- PA and sufficient amplification for the dimensions of the hall.
(Minimum 2000 Wts.)
- MONITORING and amplification on stage. A box on each side
(Minimum 1000 Wts.)
- Control snake to connect the sound table of the company.
4 sends: P.A. L / R and 2 monitors.
- Sufficient cabling and accessories

:: CONTROL POSITION

It must be located in a place from where you can see, hear and work comfortably.

Clownic

GESTURAL COMIC THEATER

(+34) 626 729 337 | info@clownic.es | www.clownic.es

:: PERSONNEL

Unload personnel

2 people loading and unloading

Assembly, disassembly and loading

2 people loading and unloading 1 electrician 1 machinist 1 sound engineer

:: THE SHOW

1 electrician on guard by dimmers and sound stages.

:: VARIOUS

Stage must be cleaned thoroughly before each performance.

Enough mineral water for installation and performance. Ironing if the theater has this service, otherwise must contact nearest laundromat.

1 dressing room for actors. 1 dressing room for technical team.

Equipped with:

- Tables
- Chairs
- Enough light
- Hot showers
- Towels
- Toilet


Still water in abundance during assembly / disassembly and show.

:: IMPORTANT: Before the arrival of the company to the theater, the lightbars have to be set with the spotlights hanging as mapped and at working height and the L and R sound connections ready. The black box must be set according to the map with cyclorama and tulle.

It is imperative, **TOTAL BLACKOUT TO ACHIEVE THIS SHOW**



C. Companys, 5 1-1
43470 · La Selva del Camp
CIF: B55623854

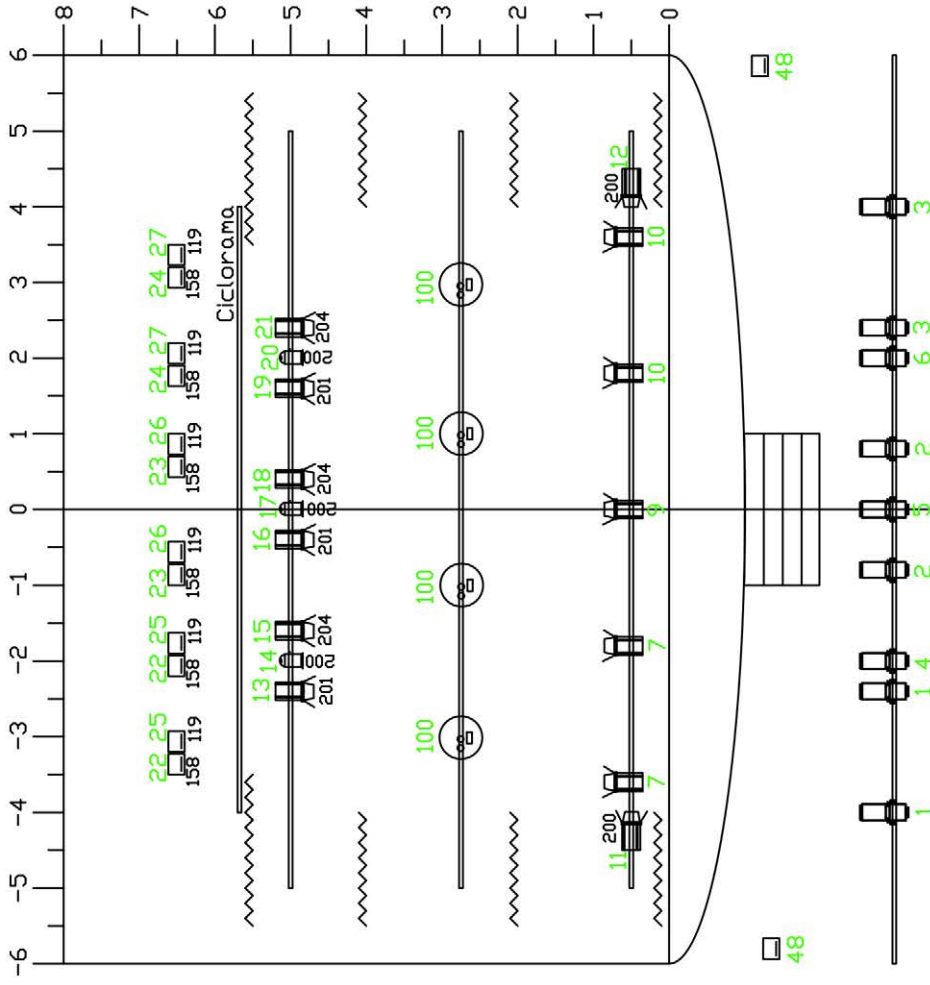

- PC 1 Kw.
- Retail 1 Kw.
- PAR 64 (CP-62).
- PAR Led.
- Assimètric 1 Kw.

Companyia:

Gagman Produccions.

Espectacle:

Turist.

Director:

Enric Ases.

Tècnic:

Sergi Sabaté.

Data:

28 de juliol de 2018